

Setup and recharge guide

The AG Water Softener fits any standard shower arm with a 1/2-inch fitting. In Europe, that is the G1/2 standard. If your shower hose screws onto the arm by hand, the AG fits it.

What's in the box

Softener unit	Salt brine tank
Regeneration pump and adapter	Adhesive hooks (2)
Hose	Setup guide

Installation

Most installs take about 5 minutes and need no tools.

The adhesive hooks hold best on a clean, dry wall. Wipe the surface dry before you start.

1. Place the hooks

Apply the adhesive hooks to a clean, dry surface.



2. Hang the unit

Hang the water softener on the hooks.



3. Connect the hoses

Connect the hose to the inlet of the wall mount adapter. Then attach the shower head hose to the outlet.



Recharging the softener

The filter recharges with plain table salt every 3 to 5 weeks. The cycle takes about 30 minutes.

1. Attach the pump

Attach the pump to the regeneration adapter. Then

2. Seat the pump

Place the pump at the bottom of the brine tank and press the

3. Add the salt

Add 500 grams of table salt, then fill the tank to about 80


attach the filter element and rotate to lock.



suction cups down firmly. Keep the drain hose outside the tank.




percent full. Stir, or wait 5 minutes.

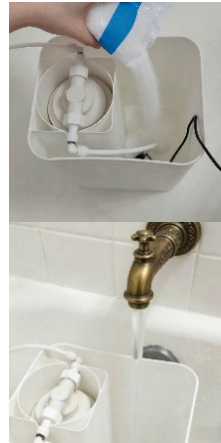


4. Run the cycle

Plug in the pump and run the recharge cycle for about 30 minutes. The tank will be empty when it finishes.



5. Rinse and reinstall

Remove the filter and rinse the pump with fresh water to prevent salt buildup. Then reinstall the filter.



Before your first shower after a recharge, run the water for one minute to flush out the remaining salt water.